

Rectangular Counter

Item.no IS-9495

Complete with:

4 posts, 2 corner trims, 1 top shelf,
1 bottom shelf, 1 inner shelf, 4 feet,
1 transport bag



Screw in the 4 adjustable feet.



Attach the 4 posts and lock the bottom clamps.



Add the middle shelf.



Attach the table top and lock the top clamps




Mount the graphic panel.




Ready to go!

Graphic production

Closed panel

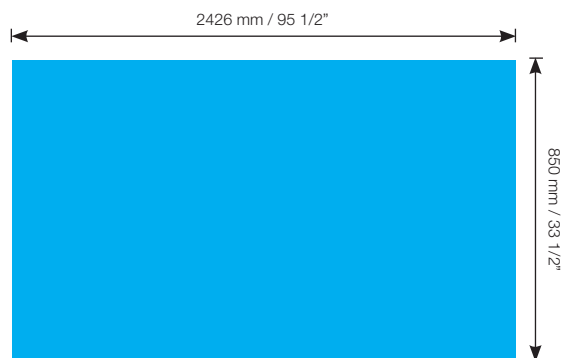


1 section open panel

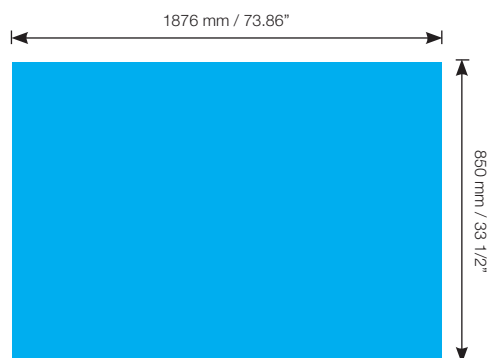

Graphic panel attachments

Magnetic tape (not incl.)
12 mm/0.5" A tape, 30 m / 98 ft. DM-013-AC



Printer material

We recommend the following material:

Poster paper: 180 gr / 0.4 lb.

The printed graphic panels must be laminated before use.
Front side: 125 microns (0,125 mm) / 0.005" "deep crystal"
Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

Polyester film: 330-370 microns (0,350 mm) / 0.013-0.015"
Top laminate: 125 microns (0,125 mm) / 0.005" "deep crystal"

Mounting of Magnetic Tape

Magnetic tape to be fixed **horizontally** and **vertically** along each side of the graphic panels.

IMPORTANT Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.