


Which button-fix?

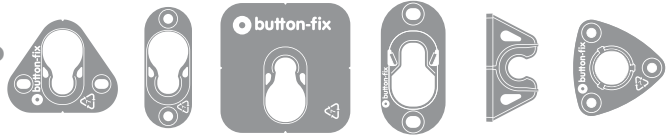

Features of the Fix	Type 1	Type 1 Flush	Type 1 Bonded	Type 1 Metal	Type 2	Type 3
Material	Nylon PA	Nylon PA6	ABS	Zinc alloy	Nylon PA66	PBT
Connects face-to-face	●	●	●	●		●
Connects at 90°					●	
Drop down/sideways engagement	●	●	●	●		
Push-on engagement					●	●
For use on fire-retardant panels				●		
Surface-mounted	●	●	●	●	●	●
Semi-rebated/recessed	●		●	●		●
Fully rebated/recessed		●				
Attached with screws	●	●		●	●	●
Bonded			●			
Minimum panel thickness	10mm (1)	18mm (2)	no restriction	10mm (1)	10mm (1)	10mm
Marker accessories	●	●	●	●	●	●
Router Multijig	●	●	●	●		
Multilingual instructions on the web	●	●	●	●	●	●
Independent load test reports (3)	●	●	●	●	●	●
2d DXF downloads on the website	●	●	●	●	●	●
3d CAD downloads on the website	●	●	●	●	●	●

- (1) 10mm minimum with Varianta/Euro screws; 15mm minimum with wood screws
- (2) Minimum panel thickness 28mm when rebating into the edge of the panel
- (3) Type 1 Bonded test reports for specific adhesive/substrate combinations only

Visit our [website](https://button-fix.com) for more information, helpful videos and details of where to buy